


## Features

- 80Watts peak pulse power ( $t_p = 8/20\mu s$ )
- Tiny DFN0603 package
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2  $\pm 30kV$  contact  $\pm 30kV$  air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 10A(8/20 $\mu s$ )

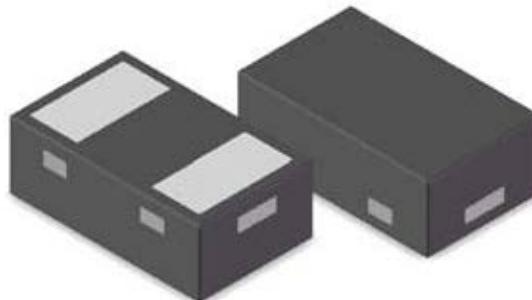


## Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation

## Mechanical Data

- DFN0603 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

## Schematic & PIN Configuration

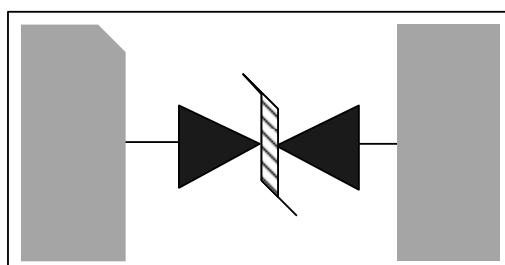

**DFN0603**



**Absolute Maximum Rating**


Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	P <sub>PP</sub>	80	Watts
Peak Pulse Current ( $t_p = 8/20\mu s$ ) (note1)	I <sub>pp</sub>	10	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V <sub>ESD</sub>	30 30	kV
Lead Soldering Temperature	T <sub>L</sub>	260(10seconds)	°C
Junction Temperature	T <sub>J</sub>	-55 to + 125	°C
Storage Temperature	T <sub>stg</sub>	-55 to + 125	°C

**Electrical Characteristics**

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V <sub>RWM</sub>				3.3	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> =1mA	3.5			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =3.3V,T=25°C			0.5	µA
Peak Pulse Current	I <sub>PP</sub>	t <sub>p</sub> =8/20µs		10		A
Clamping Voltage <sup>2)</sup>	V <sub>C</sub>	I <sub>PP</sub> =10A,t <sub>p</sub> =8/20µs		8		V
Junction Capacitance	C <sub>j</sub>	V <sub>R</sub> = 0V, f = 1MHz		18		pF

**Electrical Parameters (TA = 25°C unless otherwise noted)**

Symbol	Parameter
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
V <sub>RWM</sub>	Working Peak Reverse Voltage
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
I <sub>T</sub>	Test Current

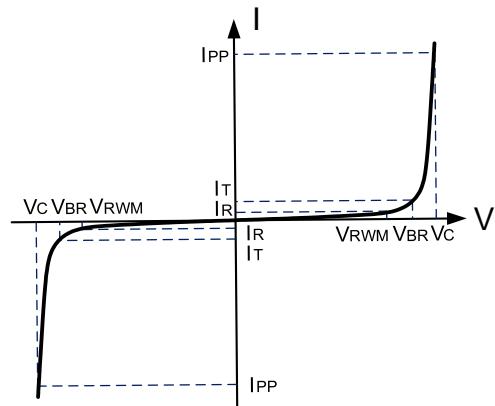


Note: 8/20µs pulse waveform.




## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

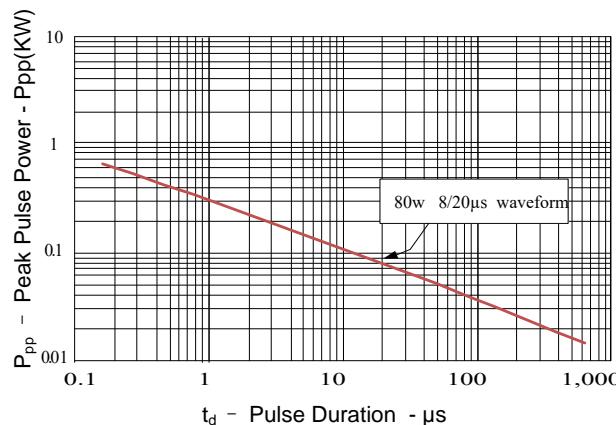


**Figure 2: Power Derating Curve**

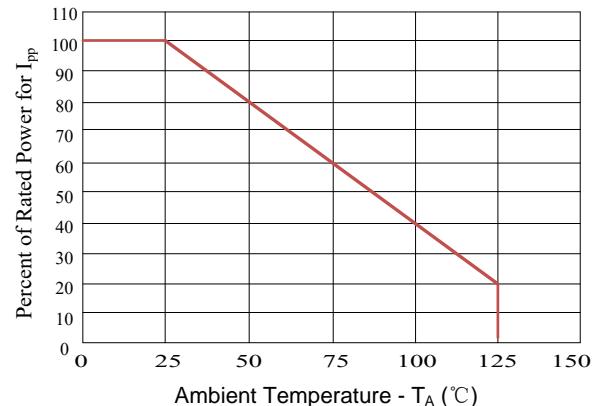


**Figure 3: Pulse Waveform**

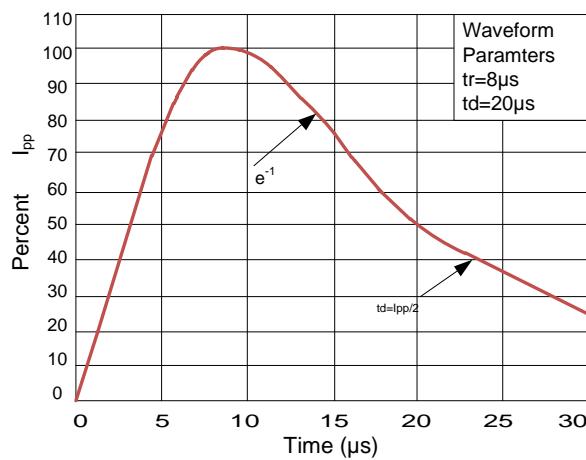

**Figure 4: Clamping Voltage vs.Ipp**

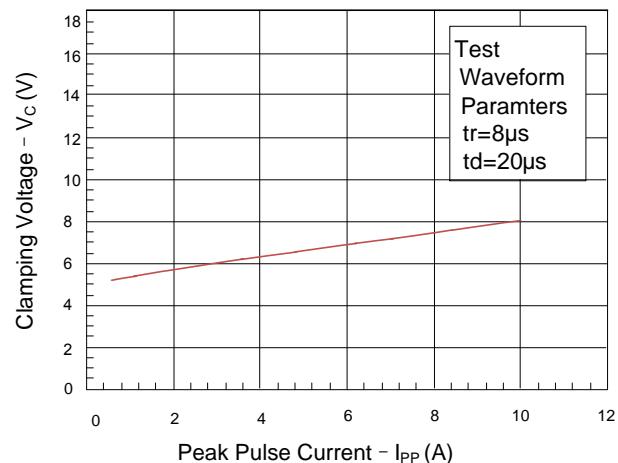


## Outline Drawing – DFN0603

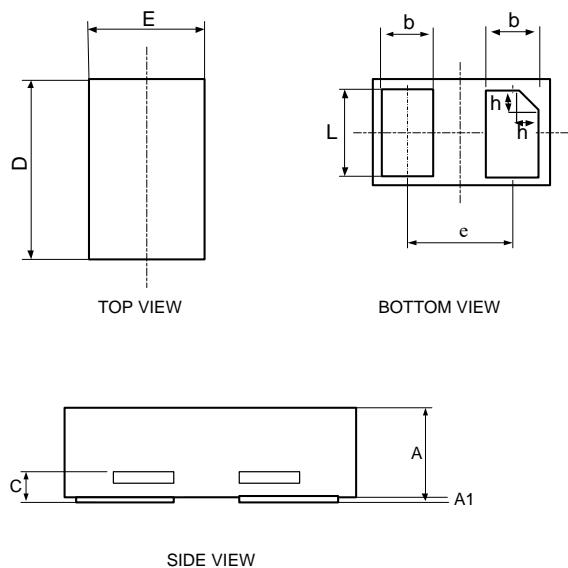

Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.28	0.30	0.34
A1	0.00	0.02	0.05
C	0.05	0.10	0.15
D	0.55	0.60	0.65
E	0.25	0.30	0.35
e	0.40		
b	0.13	0.19	0.24
L	0.20	0.25	0.30
h	0	0.05	0.10

## Marking

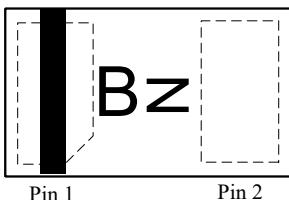

## Ordering information

Order code	Package	Base qty	Delivery mode
RL0201Q0331C	DFN0603	10k	Tape and reel

