


Description

The 1210 series provides miniature surface mount over-current protection with holding current from 0.05A to 2.60A. This series is suitable for wide range of applications in modern electronics where space is limited




Features

- | I(hold): 0.05~2.60A
- | Very high voltage surge capabilities
- | Available in lead-free version
- | Fast response to fault current
- | RoHS compliant, Lead-Free and Halogen-Free
- | Low resistance
- | Compact design saves board space
- | Compatible with high temperature solders

Applications

- | USB peripherals
- | Disk drives
- | CD-ROMs
- | General electronics
- | Disk drives
- | Set-top-box and HDMI
- | Mobile Internet Device (MID)
- | PDAs / digital cameras
- | Game console port protection
- | Plug and play protection for motherboards and peripherals
- | Mobile phones - battery and port protection

Part Number Code

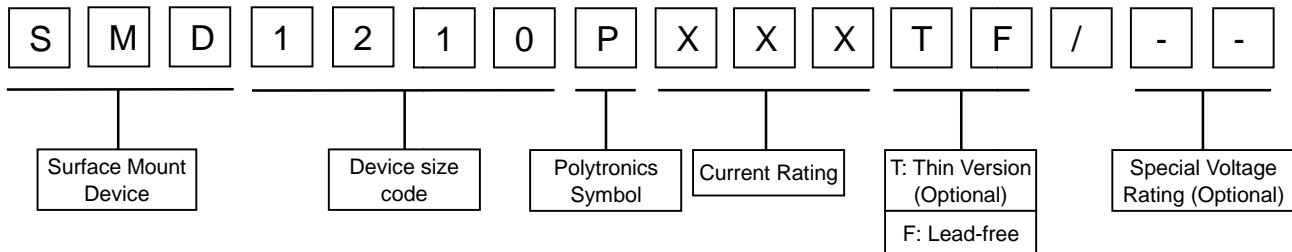

Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs	±5% typical
Humidity aging	+85°C, 85%R.H., 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20times	±33% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-202, Method 201	No change

Ambient operating conditions : - 40 °C to +85 °C

Maximum surface temperature of the device in the tripped state is 125 °C

361° Circuit Protection System



Performance Specification

Type Number	I_{hold}	I_{trip}	V_{max}	Max. Time to Trip		I_{max}	$P_d \text{ typ}$	$R_{i\min}$	$R_{1\max}$	Package
	A	A	V_{DC}	Current A	T_{max} S	A	W	Ω	Ω	
SMD1210P005TF	0.05	0.15	30	0.25	1.50	30	0.6	2.8	50	1210
SMD1210P010TF	0.10	0.30	30	0.50	0.60	30	0.6	0.8	15	1210
SMD1210P010TF/60	0.10	0.30	60	0.50	0.60	30	0.6	0.8	15	1210
SMD1210P020TF	0.20	0.40	30	8.00	0.02	30	0.6	0.4	5	1210
SMD1210P035TF	0.35	0.75	6	8.00	0.20	30	0.6	0.2	1.3	1210
SMD1210P035TF/13.2	0.35	0.75	13.2	8.00	0.20	30	0.6	0.2	1.3	1210
SMD1210P035TF/16	0.35	0.75	16	8.00	0.20	30	0.6	0.2	1.3	1210
SMD1210P050TF	0.50	1.00	13.2	8.00	0.10	30	0.6	0.18	0.9	1210
SMD1210P050TF/16	0.50	1.00	16	8.00	0.10	30	0.6	0.18	0.9	1210
SMD1210P050TF/24	0.50	1.00	24	8.00	0.10	30	0.6	0.18	0.9	1210
SMD1210P050TF/30	0.50	1.00	30	8.00	0.10	30	0.6	0.18	0.9	1210
SMD1210P075TF	0.75	1.50	6	8.00	0.10	30	0.6	0.07	0.4	1210
SMD1210P075TF/16	0.75	1.50	16	8.00	0.10	30	0.6	0.07	0.4	1210
SMD1210P100TF	1.00	2.20	6	8.00	0.30	35	0.6	0.05	0.21	1210
SMD1210P110TF	1.10	2.20	6	8.00	0.30	35	0.6	0.05	0.21	1210
SMD1210P110TF/16	1.10	2.20	16	8.00	0.30	35	0.6	0.05	0.21	1210
SMD1210P150TF	1.50	3.00	6	8.00	0.50	35	0.6	0.03	0.11	1210
SMD1210P150TF/12	1.50	3.00	12	8.00	0.50	35	0.6	0.03	0.11	1210
SMD1210P150TF/16	1.50	3.00	16	8.00	0.50	35	0.6	0.03	0.11	1210
SMD1210P175TF	1.75	3.50	6	8.00	0.60	35	0.8	0.02	0.08	1210
SMD1210P200TF	2.00	4.00	6	8.00	1.00	35	0.8	0.015	0.07	1210
SMD1210P260TF	2.60	5.20	6	8.00	2.00	35	0.8	0.01	0.06	1210

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

P_d = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

$R_{i\min/max}$ = Minimum/Maximum device resistance prior to tripping at 25°C.



$R_{1\max}$ = Maximum device resistance is measured one hour post reflow.

361° Circuit Protection System



Thermal Derating Chart-I_h(A)

Part Number	Ambient Operation Temperature								
	-40 °C	-20 °C	0 °C	25 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SMD1210P005TF	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02
SMD1210P010TF	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
SMD1210P010TF/60	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
SMD1210P020TF	0.29	0.26	0.22	0.20	0.16	0.14	0.13	0.11	0.08
SMD1210P035TF	0.47	0.45	0.40	0.35	0.33	0.28	0.24	0.21	0.18
SMD1210P035TF/13.2	0.47	0.45	0.40	0.35	0.33	0.28	0.24	0.21	0.18
SMD1210P035TF/16	0.47	0.45	0.40	0.35	0.33	0.28	0.24	0.21	0.18
SMD1210P050TF	0.76	0.67	0.58	0.50	0.43	0.40	0.36	0.32	0.28
SMD1210P050TF/16	0.76	0.67	0.58	0.50	0.43	0.40	0.36	0.32	0.28
SMD1210P050TF/24	0.76	0.67	0.58	0.50	0.43	0.40	0.36	0.32	0.28
SMD1210P050TF/30	0.76	0.67	0.58	0.50	0.43	0.40	0.36	0.32	0.28
SMD1210P075TF	1.00	0.97	0.86	0.75	0.64	0.59	0.54	0.48	0.40
SMD1210P075TF/16	1.00	0.97	0.86	0.75	0.64	0.59	0.54	0.48	0.40
SMD1210P100TF	1.69	1.48	1.29	1.00	0.88	0.76	0.65	0.57	0.43
SMD1210P110TF	1.69	1.48	1.29	1.10	0.94	0.86	0.80	0.70	0.58
SMD1210P110TF/16	1.69	1.48	1.29	1.10	0.94	0.86	0.80	0.70	0.58
SMD1210P150TF	2.13	1.92	1.71	1.50	1.26	1.14	1.01	0.89	0.71
SMD1210P150TF/12	2.13	1.92	1.71	1.50	1.26	1.14	1.01	0.89	0.71
SMD1210P150TF/16	2.13	1.92	1.71	1.50	1.26	1.14	1.01	0.89	0.71
SMD1210P175TF	2.54	2.30	2.02	1.75	1.47	1.33	1.18	1.05	0.86
SMD1210P200TF	2.90	2.63	2.31	2.00	1.68	1.52	1.35	1.20	0.98
SMD1210P260TF	3.43	3.22	2.93	2.60	2.23	2.03	1.87	1.57	1.35

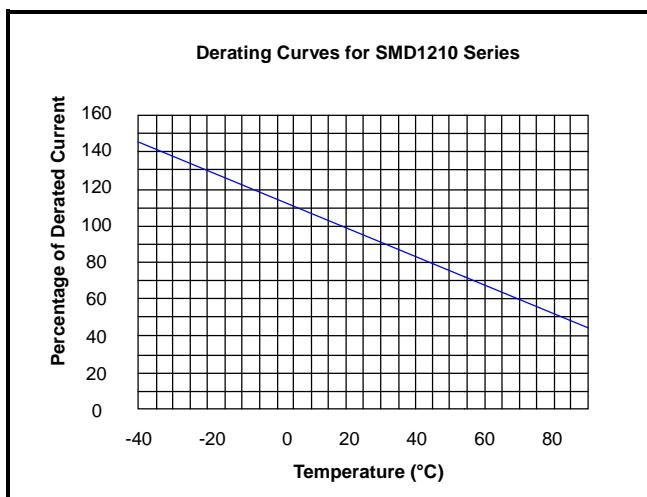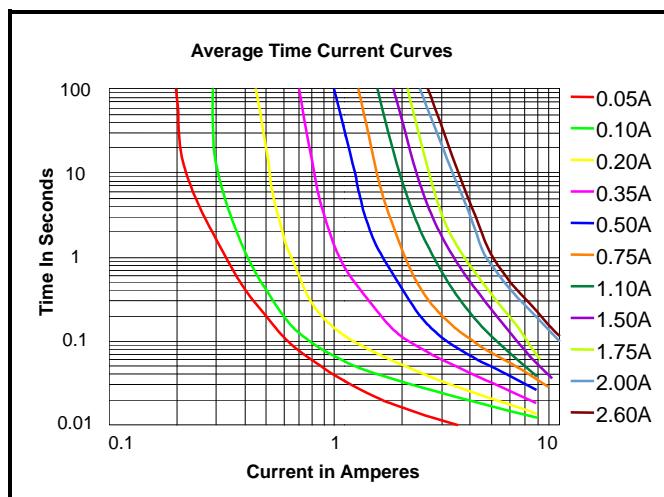Thermal Derating Curve

Average Time-Current Curve


361° Circuit Protection System


Specifications are subject to change without notice.
Please refer to <http://www.rulon.com.cn> for current information.

Revised: 2019-11-28



Page:3

Soldering Parameters

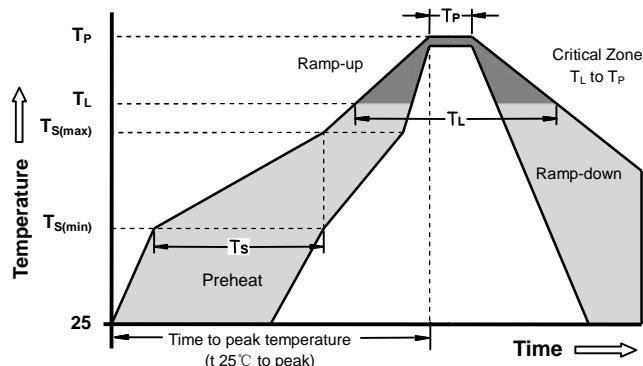

Reflow Condition		Pb - Free assembly
Pre Heat	-Temperature Min ($T_{s(\min)}$)	150°C
	-Temperature Max ($T_{s(\max)}$)	200°C
	- Time (min to max) (t_s)	60 -180 Seconds
Average ramp up rate (Liquids Temp T_L) to peak		3°C/second max
$T_{s(\max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquids)	217°C
	- Time (min to max) (t_s)	60 -150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5°C of actual peak Temperature (t_p)		20 - 40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		260°C

Lead style code	Recommended Pad Layout (mm.)

Dimensions


Type Number	Package Dimensions (mm)						Package Dimensions (in)							
	A		B		C		D	A		B		C		D
	min	max	min	max	min	max	min	max	min	max	min	max	min	max
SMD1210P005TF	3	3.5	2.35	2.8	0.6	1.2	0.3	0.118	0.138	0.093	0.110	0.024	0.047	0.012
SMD1210P010TF	3	3.5	2.35	2.8	0.6	1.2	0.3	0.118	0.138	0.093	0.110	0.024	0.047	0.012
SMD1210P010TF/60	3	3.5	2.35	2.8	0.6	1.2	0.3	0.118	0.138	0.093	0.110	0.024	0.047	0.012
SMD1210P020TF	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P035TF	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P035TF/13.2	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P035TF/16	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P050TF	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P050TF/16	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P050TF/24	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P050TF/30	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P075TF	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012

361° Circuit Protection System



Type Number	Package Dimensions (mm)							Package Dimensions (in)						
	A		B		C		D	A		B		C		D
	min	max	min	max	min	max	min	min	max	min	max	min	max	min
SMD1210P075TF/16	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P100TF	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P110TF	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P110TF/16	3	3.5	2.35	2.8	0.5	1.1	0.3	0.118	0.138	0.093	0.110	0.020	0.043	0.012
SMD1210P150TF	3	3.5	2.35	2.8	0.5	1.2	0.3	0.118	0.138	0.093	0.110	0.020	0.047	0.012
SMD1210P150TF/12	3	3.5	2.35	2.8	0.5	1.2	0.3	0.118	0.138	0.093	0.110	0.020	0.047	0.012
SMD1210P150TF/16	3	3.5	2.35	2.8	0.5	1.2	0.3	0.118	0.138	0.093	0.110	0.020	0.047	0.012
SMD1210P175TF	3	3.5	2.35	2.8	0.8	1.4	0.3	0.118	0.138	0.093	0.110	0.031	0.055	0.012
SMD1210P200TF	3	3.5	2.35	2.8	0.8	1.4	0.3	0.118	0.138	0.093	0.110	0.031	0.055	0.012
SMD1210P260TF	3	3.5	2.35	2.8	1.0	1.6	0.3	0.118	0.138	0.093	0.110	0.039	0.063	0.012

Taping and Reel Specifications

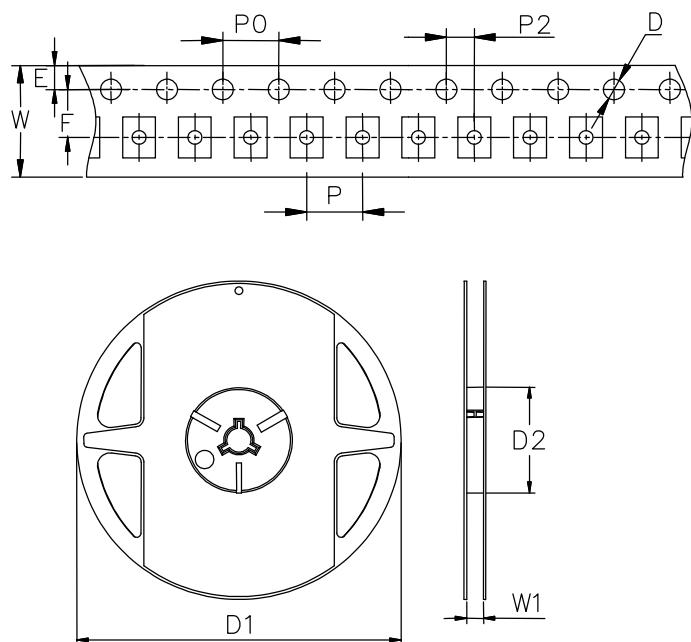

Symbol	Millimeters	Inches
W	8.15±0.3	0.321±0.012
P	4.0±0.1	0.157±0.004
F	3.5±0.05	0.138±0.002
E	1.75±0.1	0.069±0.004
D	1.55±0.05	0.061±0.002
P0	4.0±0.1	0.157±0.004
P2	2.0±0.05	0.079±0.002
D1(max.)	178	7.007
D2(min.)	60	2.362
W1	9±0.5	0.354±0.02

Part Number	Halogen Free	Packaging Option	Quantity	Quantity & Packaging Codes
SMD1210PxxTF	Yes	Tape and Reel	4000	YR

361° Circuit Protection System

Specifications are subject to change without notice.
Please refer to <http://www.rulon.com.cn> for current information.

Revised: 2019-11-28



Page:5