


## Features

- 50Watts peak pulse power ( $t_p = 8/20\mu s$ )
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2  $\pm 15kV$  contact  $\pm 15kV$  air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 7A (8/20 $\mu s$ )

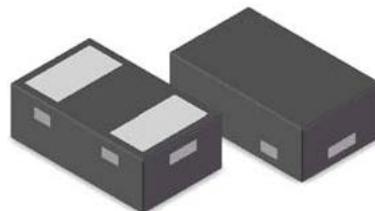


## Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation

## Mechanical Data

- DFN0603 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

## Schematic & PIN Configuration

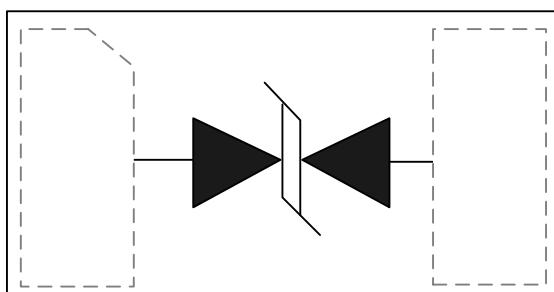

DFN0603



**Absolute Maximum Rating**


Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	50	Watts
Peak Pulse Current ( $t_p = 8/20\mu s$ ) (note1)	$I_{pp}$	7	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	15 15	kV
Lead Soldering Temperature	$T_L$	260(10seconds)	°C
Junction Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{stg}$	-55 to + 125	°C

**Electrical Characteristics**

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	$V_{RWM}$				3.3	V
Holding Voltage	$V_H$	$I_T=I_H$	2.0		3.2	V
Holding Current	$I_H$		15			mA
Reverse Leakage Current	$I_R$	$V_{RWM}=3.3V, T=25^\circ C$			500	nA
Clamping Voltage	$V_C$	$I_{PP}=7A, t_p=8/20\mu s$		6.2	7.5	V
Trigger Voltage	$V_T$		8		16	V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$		0.75		pF


**Electrical Parameters (TA = 25°C unless otherwise noted)**

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_T$	Trigger voltage
$I_T$	Test Current
$V_H$	Holding voltage
$I_H$	Holding Current

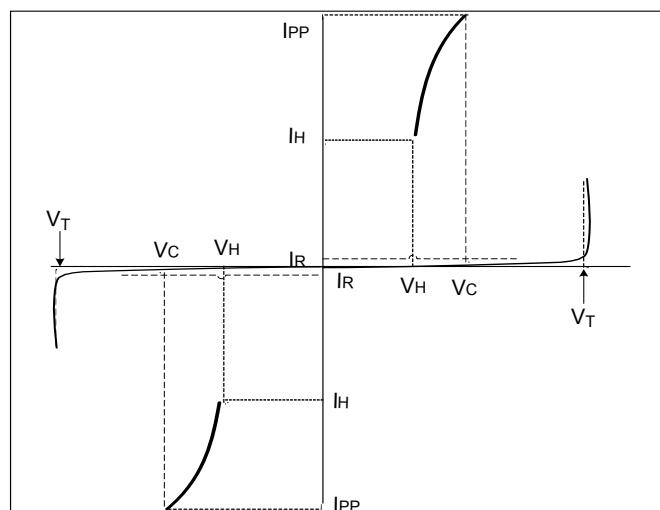


## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

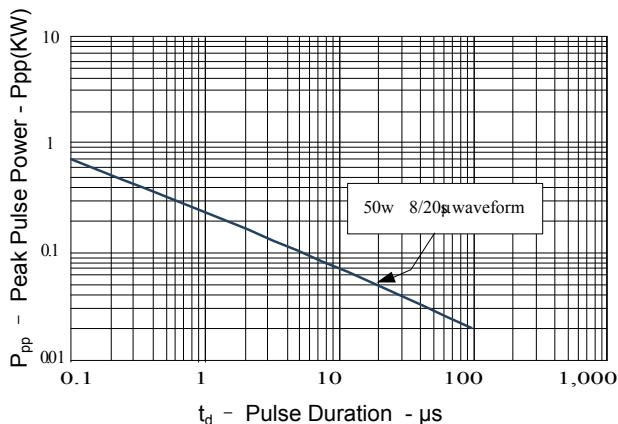


**Figure3: Pulse Waveform**

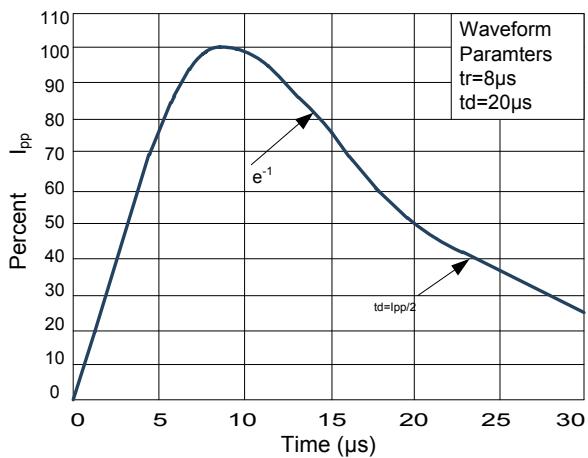


**Figure5: ESD clamping  
(+8kV contact discharge per IEC61000-4-2)**

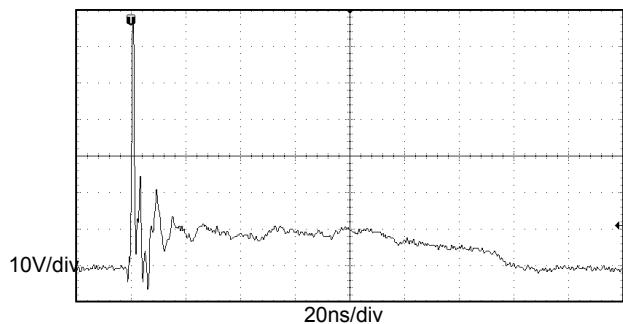


**Figure 2: Power Derating Curve**

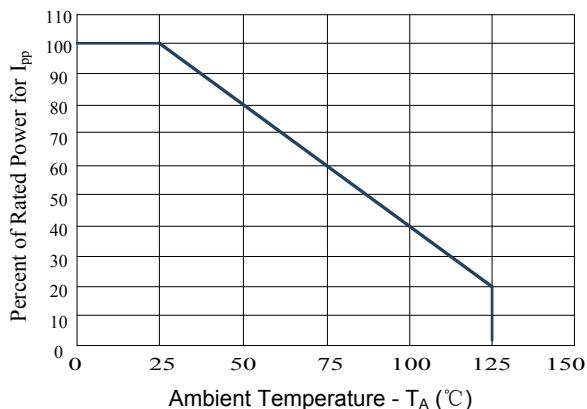


**Figure 4: Clamping Voltage vs.Ipp**

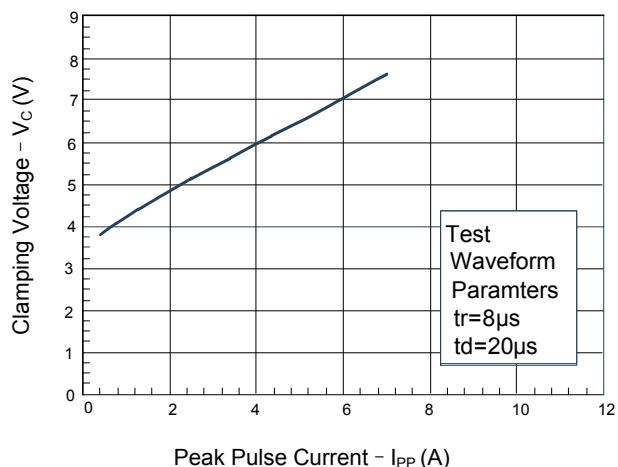

**Figure6: ESD clamping  
(-8kV contact discharge per IEC61000-4-2)**

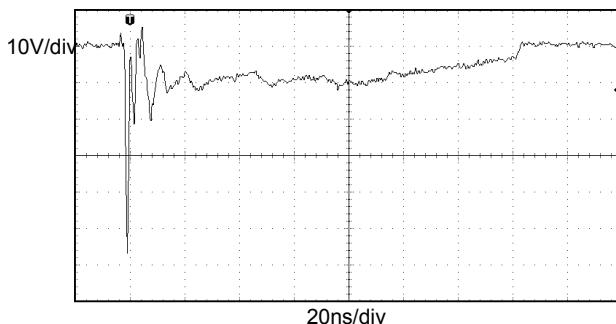

## Outline Drawing – DFN0603

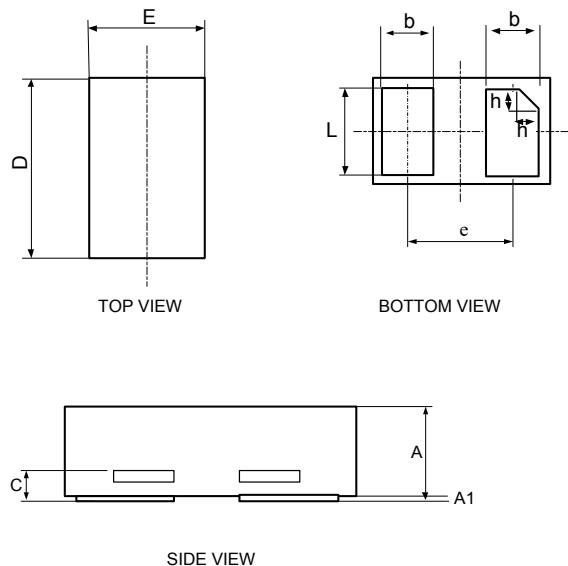

Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.28	0.30	0.34
A1	0.00	0.02	0.05
C	0.05	0.10	0.15
D	0.55	0.60	0.65
E	0.25	0.30	0.35
e		0.40	
b	0.13	0.19	0.24
L	0.20	0.25	0.30
h	0	0.05	0.10

## Marking

C2

## Ordering information

Order code	Package	Base qty	Delivery mode
RL0201Q0331LC	DFN0603	10K	Tape and reel

