

Features

- 320 Watts peak pulse power ($t_p = 8/20\mu s$)
- Unidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Protection one data/power line to:
- IEC 61000-4-2 $\pm 25kV$ contact $\pm 25kV$ air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 16A (8/20 μs)




Applications

- Power supply protection
- Power management servers

Mechanical Data

- DFN1006 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

Schematic & PIN Configuration

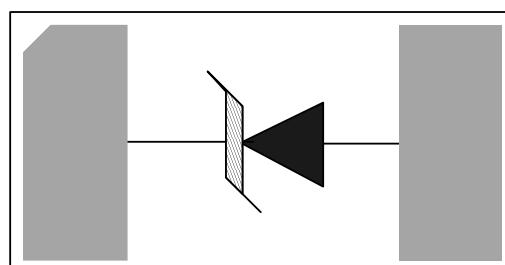

DFN1006



Absolute Maximum Rating


Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P _{PP}	320	Watts
Peak Pulse Current ($t_p = 8/20\mu s$) (note1)	I _{PP}	16	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	25 25	kV
Lead Soldering Temperature	T _L	260(10seconds)	°C
Junction Temperature	T _J	-55 to + 125	°C
Storage Temperature	T _{stg}	-55 to + 125	°C

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V _{RWM}				12.0	V
Reverse Breakdown Voltage	V _{BR}	I _T =1mA	13.3			V
Reverse Leakage Current	I _R	V _{RWM} =12V,T=25°C		0.1	0.5	µA
Peak Pulse Current	I _{PP}	t _p =8/20µs			16	A
Clamping Voltage	V _C	I _{PP} =16A,t _p =8/20µs		20		V
Junction Capacitance	C _j	V _R = 0V, f = 1MHz		80	85	pF

Electrical Parameters (TA = 25°C unless otherwise noted)

Symbol	Parameter
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
V _{RWM}	Working Peak Reverse Voltage
I _R	Maximum Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current

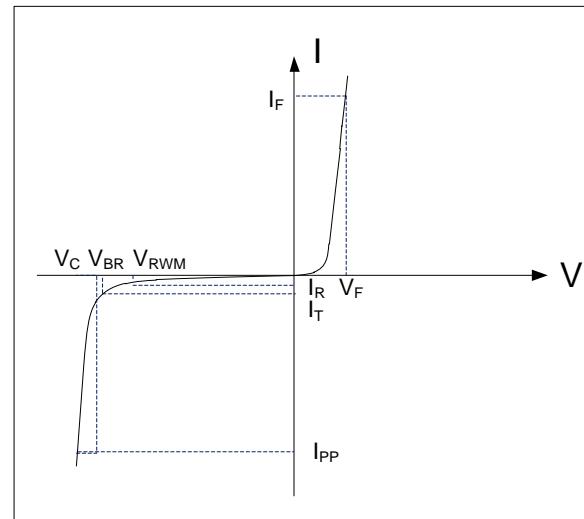

Note:.. 8/20µs pulse waveform.



Typical Characteristic

Fig.1 Peak Pulse Power Rating Curve

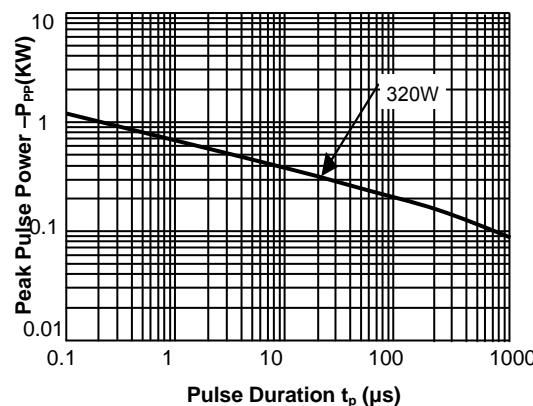


Fig.2 Pulse Derating Curve

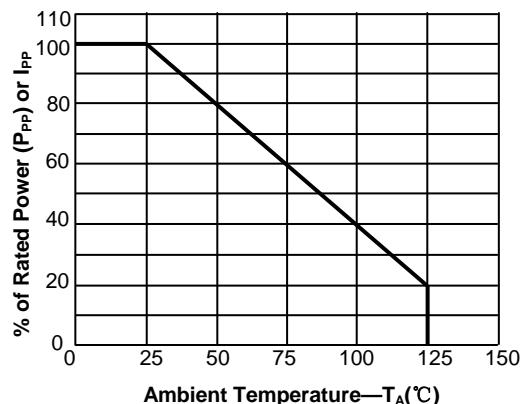


Fig.3 Pulse Waveform-8/20 μs

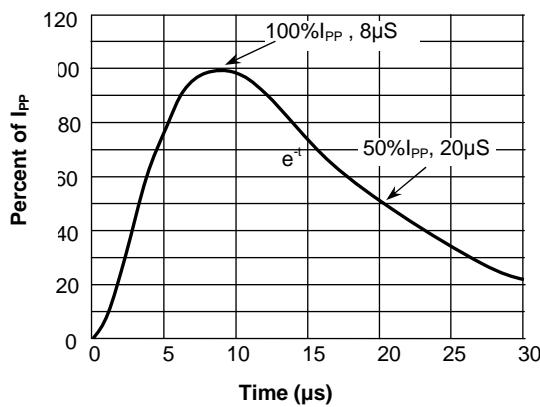


Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

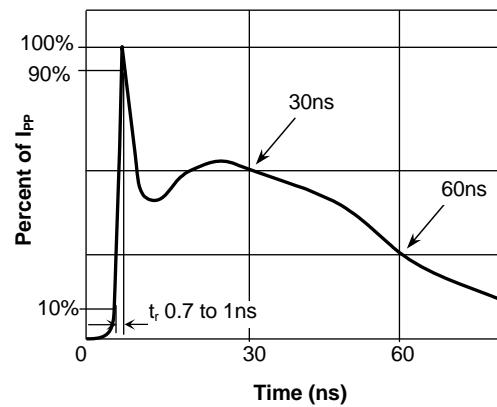


Fig.5 IEC61000-4-2 +8kV Contact Discharge



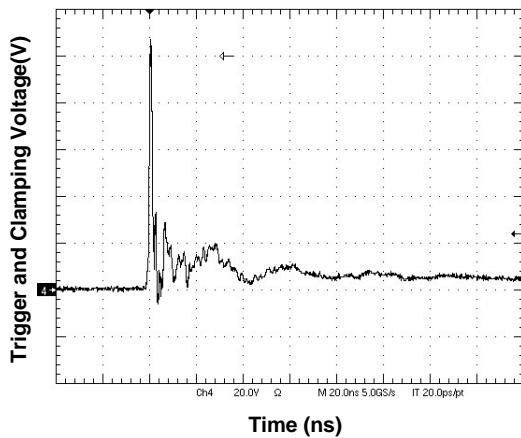


Fig.6 IEC61000-4-2 -8kV Contact Discharge

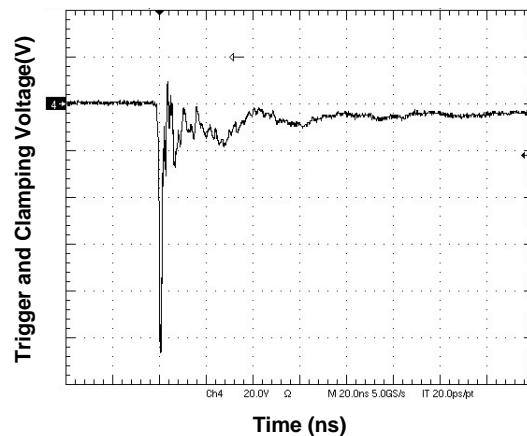

Outline Drawing – DFN1006

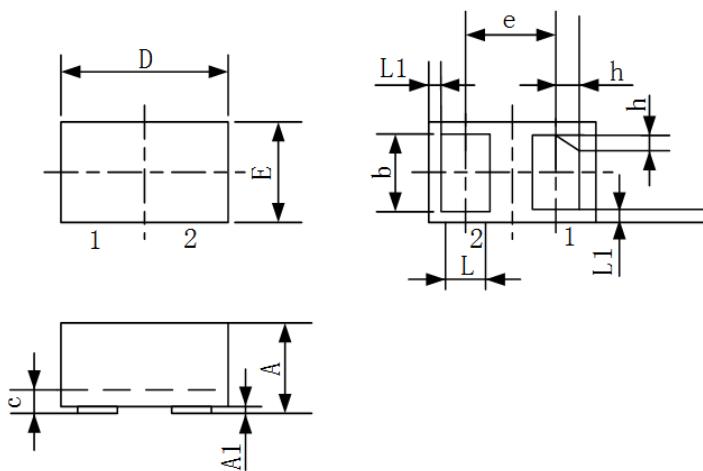

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.40	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
c	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05REF		
h	0.07	0.12	0.17
载体尺寸 (MIL)	20*20		

Marking



Ordering information

Order code	Package	Base qty	Delivery mode
RLSD92Q121V	DFN1006	10k	Tape and reel

